




# Brackets aluminum tapered truss arms (TRU) series

Brackets of aluminum tapered tube and schedule pipe are supplied with aluminum pole plate, designed for square and round pole mounting onto metal, wood and concrete poles.

**Standard features include:**

- fixed tenon 2-3/8" O.D. x 6" long
- rotary sanded or thermoset polyester powder coated

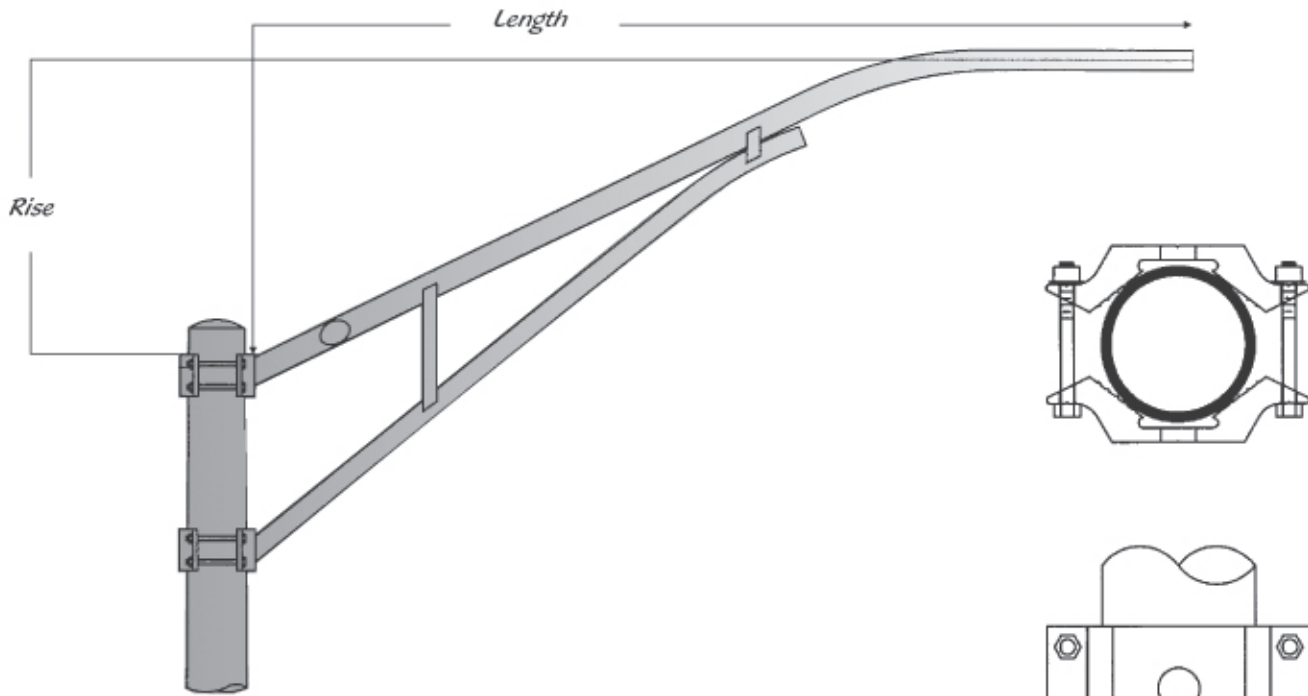

6063 T6 ALLOY ARM/BRACE  
UPPER TUBE 3.5" TUBE  
LOWER TUBE 2" SCH 40 PIPE

| BRACKET – TAPERED TRUSS SERIES |               |             |                |                                |                                |                         |                                   |
|--------------------------------|---------------|-------------|----------------|--------------------------------|--------------------------------|-------------------------|-----------------------------------|
| CATALOG NUMBER                 | LENGTH<br>"L" | RISE<br>"R" | DEGREES<br>"C" | TUBE SIZE<br>UPPER<br>(INCHES) | TUBE SIZE<br>LOWER<br>(INCHES) | BRACKET<br>WEIGHT (LBS) | LUMINAIRE MOUNTING<br>HEIGHT (FT) |
| TRU 8                          | 8'            | 39"         | 3-5            | 3.5"                           | 2" SCH PIPE                    | 43                      | Pole Height + 2.5'                |
| TRU 10                         | 10'           | 39"         | 3-5            | 3.5"                           | 2" SCH PIPE                    | 52                      | Pole Height + 2.5'                |
| TRU 12                         | 12'           | 39"         | 3-5            | 3.5"                           | 2" SCH PIPE                    | 61                      | Pole Height + 2.5'                |
| TRU 15                         | 15'           | 39"         | 3-5            | 3.5"                           | 2" SCH PIPE                    | 74                      | Pole Height + 2.5'                |